

STRIP LED 3014 IP20 17,2 W/mt

Led type	3014 EPISTAR
Power	17,2 W/mt
Cut	5 cm
IP	IP20
Led quantity	192
Continuous connection	5 mt
Warranty	2 years



Model Number	Description	Color	Voltage	Lumen/mt
17.2W24V00NW2014	Strip led 192 led/mt 3014 EPISTAR natural white	4000 - 4500 K	24 V	2370
17.2W24V00WW2014	Strip led 192 led/mt 3014 EPISTAR warm white	2700 - 3000 K	24 V	2200

SAFETY INFORMATION

- The strip itself and all its components should not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- Correct electrical polarity needs to be observed. Wrong polarity may destroy the strip.
- Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the strip.
- Pay attention to standard ESD precautions when installing the strip.

• Installation of LED ribbon (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.

LED SOLUTIONS

DUEGI LIGHTING



т п	
Questo dispositivo è munito di lampade a LED integrate.	
Le lampade di questo dispositivo non sono sostituibili.	
874/2012	

APPLICATION

- Cove lighting
- Architectural lihts for canopy, corridor, window, archway
- Backlight or edge lighting for signage
- DIY lights for home use
- Decorative lights for holiday, event, show, exhibition
- Path and contour marking


ADVANTAGES

- Eco friendly
- Long life span
- Complete connection accessories
- No need of costant-current power

feed

• Low power consumption

CIRCUIT DRAWINGS

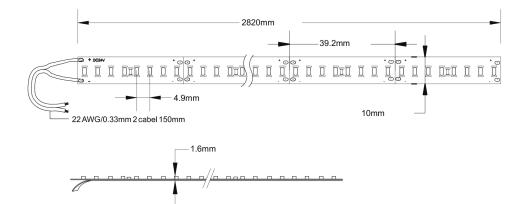

LED SOLUTIONS

DUEGI LIGHTING